

# CYCLOPS LIGHTING




ENTERTAINMENT

**Flash 288** is a powerful IP65 LED wash light powered by 88 x 20 watts RGBW LEDs. In addition to its default long throw beam angle of 20°, it comes packed with a magnetic diffuser filter providing a wide 40° wash for medium throw applications. The powerful light output can also be shaped using the optional two 3-way barn doors. FLASH 288 is equipped with a built-in W-DMX™ wireless DMX receiver by Wireless Solution Sweden.

|                                  |   |
|----------------------------------|---|
| <b>SOURCE</b>                    | Light source: 88 x 20 watts, RGBW LEDs<br>LED life expectancy: 50,000 Hrs<br>CRI <80  |
| <b>OPTICAL SYSTEM</b>            | Beam angle: 20°<br>40° with a magnetic diffuser filter<br>Light output: 85,000Lux @ 2m @ 40°<br>Individual angle rotation adjustment for each head  |
| <b>DYNAMIC EFFECTS</b>           | Dimmer: 4 selectable dimming curves<br>Color mixing: RGBW<br>Strobe effect<br>Built-in effects  |
| <b>CONTROL &amp; PROGRAMMING</b> | Control protocols: DMX, Master-Slave, Auto Run<br>W-DMX™ by Wireless Solution<br>Display: TFT displayer with 4 buttons<br>Control channels: 2, 3, 4, 9, 12 CHs                              |
| <b>ELECTRICAL</b>                | Input voltage: 190-264V/50-60Hz<br>Power consumption: 1600 watts<br>Power supply: Auto-ranging electronic switch-mode   |
| <b>CONNECTIONS</b>               | DMX connections: 3 pin XLR In/Out male and female<br>Power connections: IP Power In/Out cable   |
| <b>PHYSICAL SPECIFICATIONS</b>   | Dimensions: 602 x 430 x 437mm<br>Net weight: 23.5 Kg<br>Color: Black<br>Painting: Anti-salt and Anti-UV<br>Housing: Die-cast Aluminum<br>IP rating: 65<br>Operating temperature: -40°C/45°C |

## Dimensions

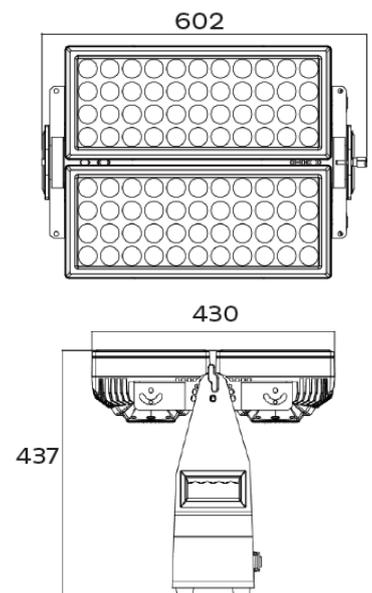

## Luminous Diagram

